
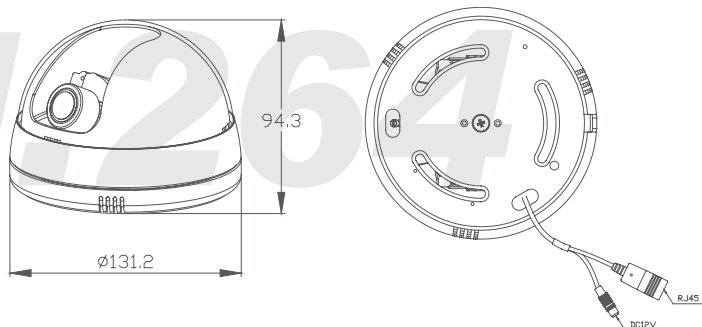


## Features

- 2 Mega pixel (1600 x 1200) resolution with excellent picture performance
- H.264/MPEG4/JPEG triple stream
- SD card for recording during alarm trigger & network outage
- 2-way audio
- Mobile view support WM6.5/Symbian/iPhone/Blackberry & Android
- POE (Power over Ethernet) for option

# IP CAM

## YUC-HM96-279

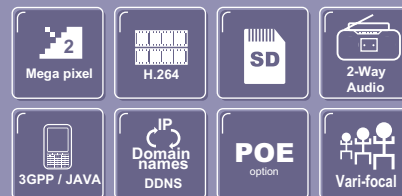

## YUC-HM96-279

### H.264 2 MEGA PIXEL INDOOR DOME CAMERA

Max Resolution	2 Mega pixel (1600 x 1200), SXGA, Quad VGA, SVGA, VGA, CIF, QCIF
Video Adjustment	Image setting, video streaming setting
Frame Rate	NTSC: 15FPS / PAL: 15FPS (2M mode)
Network Interface	Ethernet (10/100 Base-T)
Video Compression	Triple stream: H.264 / MPEG4 / JPEG selection
Audio Compression	2-way
Pre / Post Alarm	Yes, configurable
SD card	AVI video format (remote access)
Hardware	RJ-45 (Ethernet)
Alarm I/O	1 x in / 1 x relay out
Video Input / Output	1 x video out
Audio Input / Output	1 x audio in, 1 x audio out
Performance	Max. 10 connections for signal video
Event trigger / Action	Schedule I/O & motion dection, sent AVI files to FTP, E-mail or SD card
Protocols	TCP/IP, HTTP, FTP, SMTP, DDNS, PPPoE, DHCP, NTP, UPnP, 3GPP, UPnP Forwarding, Multicast
IP assignment	DHCP, PPPoE or Static IP
System Requirement	Microsoft IE6 / IE7 or above
Security	2 layers password protection
Image Pick-up Device	1/4" Micron CMOS
Back Light Compensation	Auto
Electronic Shutter	1/50 (1/60) ~ 1/100,000s
Gain Control	Auto
Gamma	0.45
S/N Ratio	48dB (AGC off)
Video Output	BNC, 1Vp-p, 75 Ohms
Min Illum	0.1 Lux @F1.2
Lens	2.7-9mm /F1.2
Power over Ethernet	POE(IEEE 802.3af) for option
Power	LAN: DC12V (max. 6W)
Dimension / Weight	131(φ)x94.5(H)mm / @300g / 20pcs per carton
Operation Temp.	-10°C ~ +45°C



H.264



NORMAL SCENE



2 MEGA PIXEL SCENE

#### ORDER INFORMATION

	Wire	POE
YUC-HM96-279	☉	
YUC-HM96-279P	☉	☉

Wył czny importer: [www.merx.com.pl](http://www.merx.com.pl)

<http://www.yudor.com.tw>