


HD 720p Real Time Network Mini Dome Camera

YUC-HNi85/YUC-HN85P

Feature

- H. 264/ MPEG-4/ JPEG triple codec
- Micro SD card for sudden network outage or alarm recording
- ICR cut filter for exquisite day and night image
- Mobile surveillance
- PoE support
- ONVIF compliant

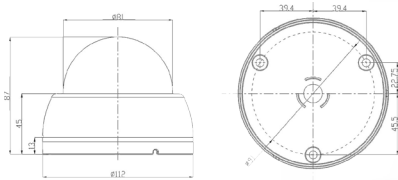


IP cam

YUC-HNi85

YUC-HN85P

	YUC-HNi85	YUC-HN85P	
Camera Features	Image Pick-up Device	1/4" Progressive Scan CMOS sensor	
	Effective Pixels (H x V)	1280x720	
	Lens Type	Fixed	
	Focal Length/ F-number	f: 4.2mm, F: 1.6	
	Electronic Shutter Speed	1/5~1/100,000 second(s), indoor, outdoor setting	
	Gain Control	AGC Adjustable (2x~24x)	
	Gamma	Indoor & Outdoor	
Day/ Night	ICR cut filter		N/A
	LED Ranges	7pcs : 5M	N/A
Image	Network Compression	H.264/ MPEG-4/ M-JPEG	
	Image Size	1280x800, 1280x720, 640x480, 320x240,176x144	
	Max. Frame Rate	30fps in all resolutions	
	Intelligence Support	D-WDR,DNR,Sense-Up, Motion Detection, Mask, VBR/CBR	
Network Server	Protocols	Access list, Bonjour, DHCP, DDNS, FTP, HTTP, HTTPS, IPv4, IPv6 IEEE 802.1X, Multicast NTP PPPoE, QoS/DSCP, RTSP, SAMBA SMTP, SNMP, UPnP, UPnP Forwarding	
	Traffic Controls	32/48/64/96/128/196/256/320/384/448/512/576/640/704/768Kbps 1/1.5/2/2.5/3/3.5/4/6/8Mbps	
	Number of Users	Max. 10 connections for singal video	
	Safety	User-ID and password	
Interface	Ethernet	RJ45 (10/ 100 Base-T)	
	Storage Device	Micro SD, FTP, Mail, NAS, and SAMBA	
General	Processors	ARM 9 ,32 bit RISC	
	Memory	128MB-RAM, 16MB-Flash	
	Power	N/A	PoE IEEE 802.3 af (Class 0)
	Operation Voltage	DC12V	
	Dimen./Weight	112mm (Φ) x 87mm (H) 300g/ 20pcs per carton	
	Operation Temp.	-10°C ~ +45°C, relative moisture 20%-90%	
Included Accessories	CD/ IP recorder/ IP installer/ Installation guide/ Detail user manual		



Product code: R-ICR, P-PoE

Wył czny importer: www.merx.com.pl

*No SD/SDHC card for argentina.