


# H.264 IP 2 MEGA PIXEL CMOS 3-AXIS VANDAL DOME


## YUC-HO96 / YUC-Hi96R

### Feature

- 2 Mega pixel (1600 x 1200) progressive scan
- H.264/MPEG-4/JPEG triple streams simultaneously
- 3-Axis design with vandal proof & IP 66
- Varifocal auto iris lens
- Up to 32G SD card recording for alarm trigger & network outage
- Optical IR cut removal (ICR) built in
- 2-way audio
- Mobile view support
- PoE support



YUC-Hi96R

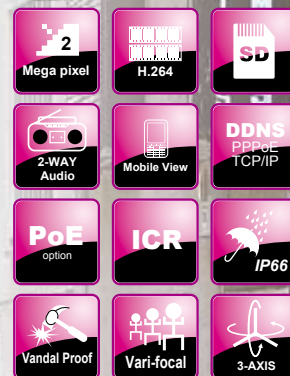

Server	Network Compression	Triple streams:H.264/MPEG-4/JPEG
	Pixel (H x V)	1600x1200, 1280x1024, 1280x960, 1280x720, 800x592,640x480, 320x240, 176x144
	Traffic Control	32/48/64/96/128/196/256/320/384/448/512/576/640/704/768K bps 1/1.5/2/2.5/3/3.5/4/6/8Mbps
	Max. Frame Rate	Max. 30FPS (1280x720, 800x592, 640x480, 320x240, 176x144), 25FPS (1280x960), 22FPS (1280x1024), 15FPS (1600x1200)
	Safety	User-ID and password
	Protocol	TCP, UDP, IP, HTTP, FTP, SMTP, DHCP, PPPoE, DNS, DDNS, NTP, UPnP, UPnP forwarding, RTSP
	Number of User	Max. 10 connections for singal video
	Storage Capacity	SD card
	Alerting	SMTP, FTP, HTTP, SD card
	Pre / Post Alarm	Pre (0,1,2,3,4,5), post(0,1,2,3,4,5,10) seconds
	Release for alarm	Motion detection, I/O or schedule
Network Camera	Image Pick-up Device	1/3" Progressive Scan CMOS sensor, approximately 2 mega pixel
	BLC	Auto (ON/OFF)
	Electronic Shutter	1/50 (1/60) ~ 1/100,000 second
	Video Output	1Vp-p, 75 Ohms
	Min Illum.	0.1 - 100.000 Lux (in night color mode 0.01-100.000 Lux)
	Lens	2.7-9mm auto iris for YUC-Hi96R / 2.7-9mm manual iris for YUC-HO96
Audio	Optical	IR cut filter for YUC-Hi96R
	IR LED / Range	YUC-Hi96R: 18 units IR LED for 15 meter
	Audio Communication	2-way-halfduplex
	Audio Compression	ADPCM 32Kbps
Terminal	Frequency	300 Hz - 3.4KHz
	Audio In	Connecting base, line in for microphone
	Audio Out	Connecting base, line out for external speaker
	Network Interface	Ethernet(10Base-T/100Base-Tx)
General	Video Interface	Connecting base, Video composi (NTSC/PAL)
	External Port	Alarm-in x1 / relay-out x1
	SD Card	SD memory card with the 32GB, 16GB, 8GB, 4GB~64MB
	Operation Voltage	PoE: 48V, IEEE 802.3af for option (max. 7W) LAN: 12V DC (max. 6W)
Dimen./Weight	142(H)x142(W)x100(D)mm / @1,000g / 12pcs per carton	
Operation Temp.	-20°C ~ +45°C, relative moisture 20%-90%	
Waterproof	IP66	



Vandal dome is with 3-axis mechanism, which you can install at any location and get picture you want.

### Order Reference

YUC-HO96P: PoE \ YUC-Hi96R: IR/ICR \ YUC-Hi96RP: IR/ICR/PoE

YUC-HO96

Wyłączny importer: [www.merx.com.pl](http://www.merx.com.pl)

[www.yudor.com.tw](http://www.yudor.com.tw)