


H.264 IP 1.3 MEGA PIXEL CMOS COMPACT CAMERA

YUC-HS95

Feature

- 1.3 Mega pixel (1280 x 1024) progressive scan CMOS sensor
- H.264/MPEG-4/JPEG triple streams simultaneously
- Compact size & easy operation
- 2-way audio
- Mobile view support
- wireless optional

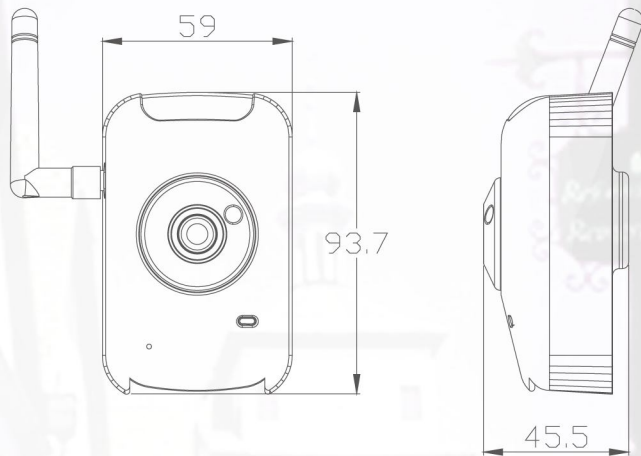

Network Compression	Triple streams: H.264/MPEG-4/JPEG
Pixel (H x V)	1280x1024, 1280x960, 800x592, 640x480, 320x240, 176x144
Traffic Control	32/48/64/96/128/196/256/320/384/448/512/576/640/704/768Kbps 1/1.5/2/2.5/3/3.5/4/6/8Mbps
Max. Frame Rate	Max. 30FPS (640x480, 320x240, 176x144), 15FPS (1280x1024, 1280x960, 800x592)
Safety	User-ID and password
Protocol	TCP, UDP, IP, HTTP, FTP, SMTP, DHCP, PPPoE, DNS, DDNS, NTP, UPnP, UPnP forwarding, RTSP
Number of User	Max. 10 connections for singal video
Alerting	SMTP, FTP, HTTP
Pre / Post Alarm	Pre (0, 1, 2, 3, 4, 5), post (0, 1, 2, 3, 4, 5, 10) seconds
Release for alarm	Motion detection, I/O or schedule
Image Pick-up Device	1/4" Progressive Scan CMOS sensor approximately 1.3 mega pixel
BLC	Auto (ON/OFF)
Electronic Shutter	1/50 (1/60) ~ 1/100,000 second
Min Illum.	1.5 - 100.000 Lux (in night color mode 0.5-100.000 Lux)
Lens	4mm lens
Audio Communication	2-way-halfduplex
Audio Compression	ADPCM 32Kbps
Frequency	300 Hz - 3.4KHz
Audio In	Microphone built in
Audio Out	3.5mm, line out for external speaker
Network Interface	Ethernet(10Base-T/100Base-Tx)
Operation Voltage	LAN: 12V DC (max. 3W), WiFi: 12V DC (max. 4W)
Dimen./Weight	93.7(H)x59(W)x45.5(D)mm / @180g / 12pcs per carton
Operation Temp.	-10°C ~ +45°C, relative moisture 20%-90%

